


**Conforce 0960 HE Fibres** are a popular fibre for many concrete applications including slabs on ground. The fibres are made from cold drawn low carbon steel fibre with a  $>1100\text{N/mm}^2$  (1100mpa) tensile strength. The fibres are supplied glued and have a single hook on each end to form a good mechanical bond with the concrete to improve first crack strength.



20kg Bag

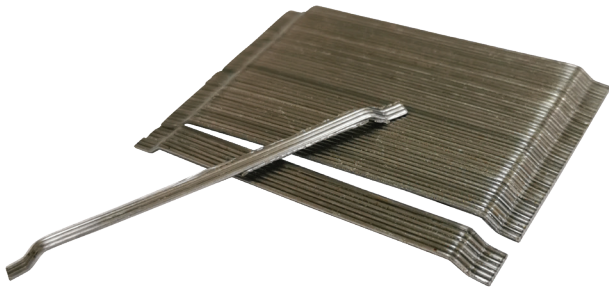

Palletised Bags

### 0960 HE Steel Fibres:

- Are simple to use, easy to handle.
- Reduce labour time and costs when placing concrete
- Save labour costs by replacing rebar and mesh
- Provide multi directional reinforcement
- Do not require any specialised finishing equipment
- Improve impact resistance and crack width control
- Can be used with all types of cement and concrete

*A batch tensile strength certificate for compliance purposes can be supplied with every order.*

0960 HE Steel Fibres	
Length	60mm
Equivalent Diameter	0.90mm
Aspect Ratio l/d	65
Tensile Strength	$>1100\text{N/mm}^2$ (mpa)
X sectional shape	Round
Deformations	Hook end
Material type	Low carbon, cold drawn wire

### Mixing Information

The fibres must not be added first, they can be gradually added by conveyor during the batching process or at the end of the batching process. The mixing drum should be rotated at full speed for five minutes after the fibres are added to ensure even fibre distribution. Depending on requirements the dose rate may vary between 25 - 50kg/m<sup>3</sup>.

### Packing & Storage

Supplied in 10kg, 20kg paper bag and 1200kg bulk bags. Also supplied by special order in 10kg disintegrating bags to improve efficiency and eliminate packing waste. Saves time and bag disposal costs by adding the bag and fibre to the mix. Keep dry, store under cover.

### Other Conforce Products

- MP48 Synthetic fibre
- S38 Crimped steel fibre
- CCM 13 Copper coated micro fibre
- 0930HE High tensile hook end steel fibre
- 0960HE High tensile glued hook end steel fibre
- WRC 38 Crimped wire fibre

### Compliance

Conforms to ASTM A820 Type I

### Applications

- Pre-cast
- Slabs on ground
- Factory floors

0438 220 606  
sales@conforce.com.au