


Tensile Strength Certificate

Fibre type/code	0960HEG	Report No	SWK1160-S
Batch No.	SW 108 HEG	Temperature	12°C
Test standard	rg\t	Air Humidity	63%
Length mm	60	Test Date	15-Dec-21
Aspect ratio l/d	67	Report date	09-Mar-22

Sample No	Equivalent diameter	Cross sectional area	Breaking force in Newtons	Tensile Strength N/mm ²
		mm ²	(N)	(MPa)
1	0.90	0.636	730.04	1147.55
2	0.90	0.636	749.52	1178.17
3	0.90	0.636	748.95	1177.28
4	0.90	0.636	777.03	1221.41
5	0.90	0.636	774.16	1216.90
6	0.90	0.636	760.70	1195.74
7	0.90	0.636	745.22	1171.41
8	0.90	0.636	753.25	1184.03
9	0.90	0.636	769.58	1209.70
10	0.90	0.636	711.99	1119.18
Average			752.04	1182.14
Maximum			777.03	1221.41
Minimum			711.99	1119.18

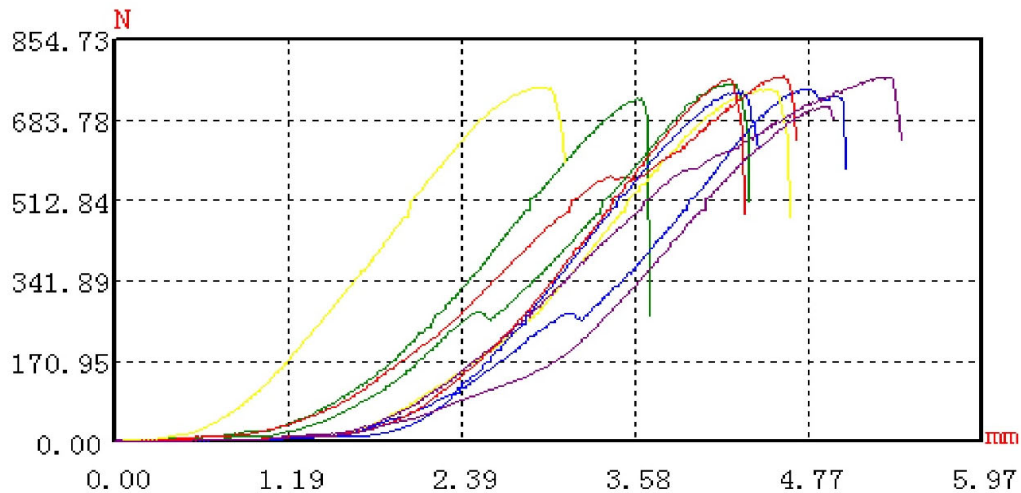

曲线颜色按 1 2 3 4 5 循环显示。