


# Septic Tank Outlet Filter

STAINLESS STEEL PRODUCTS

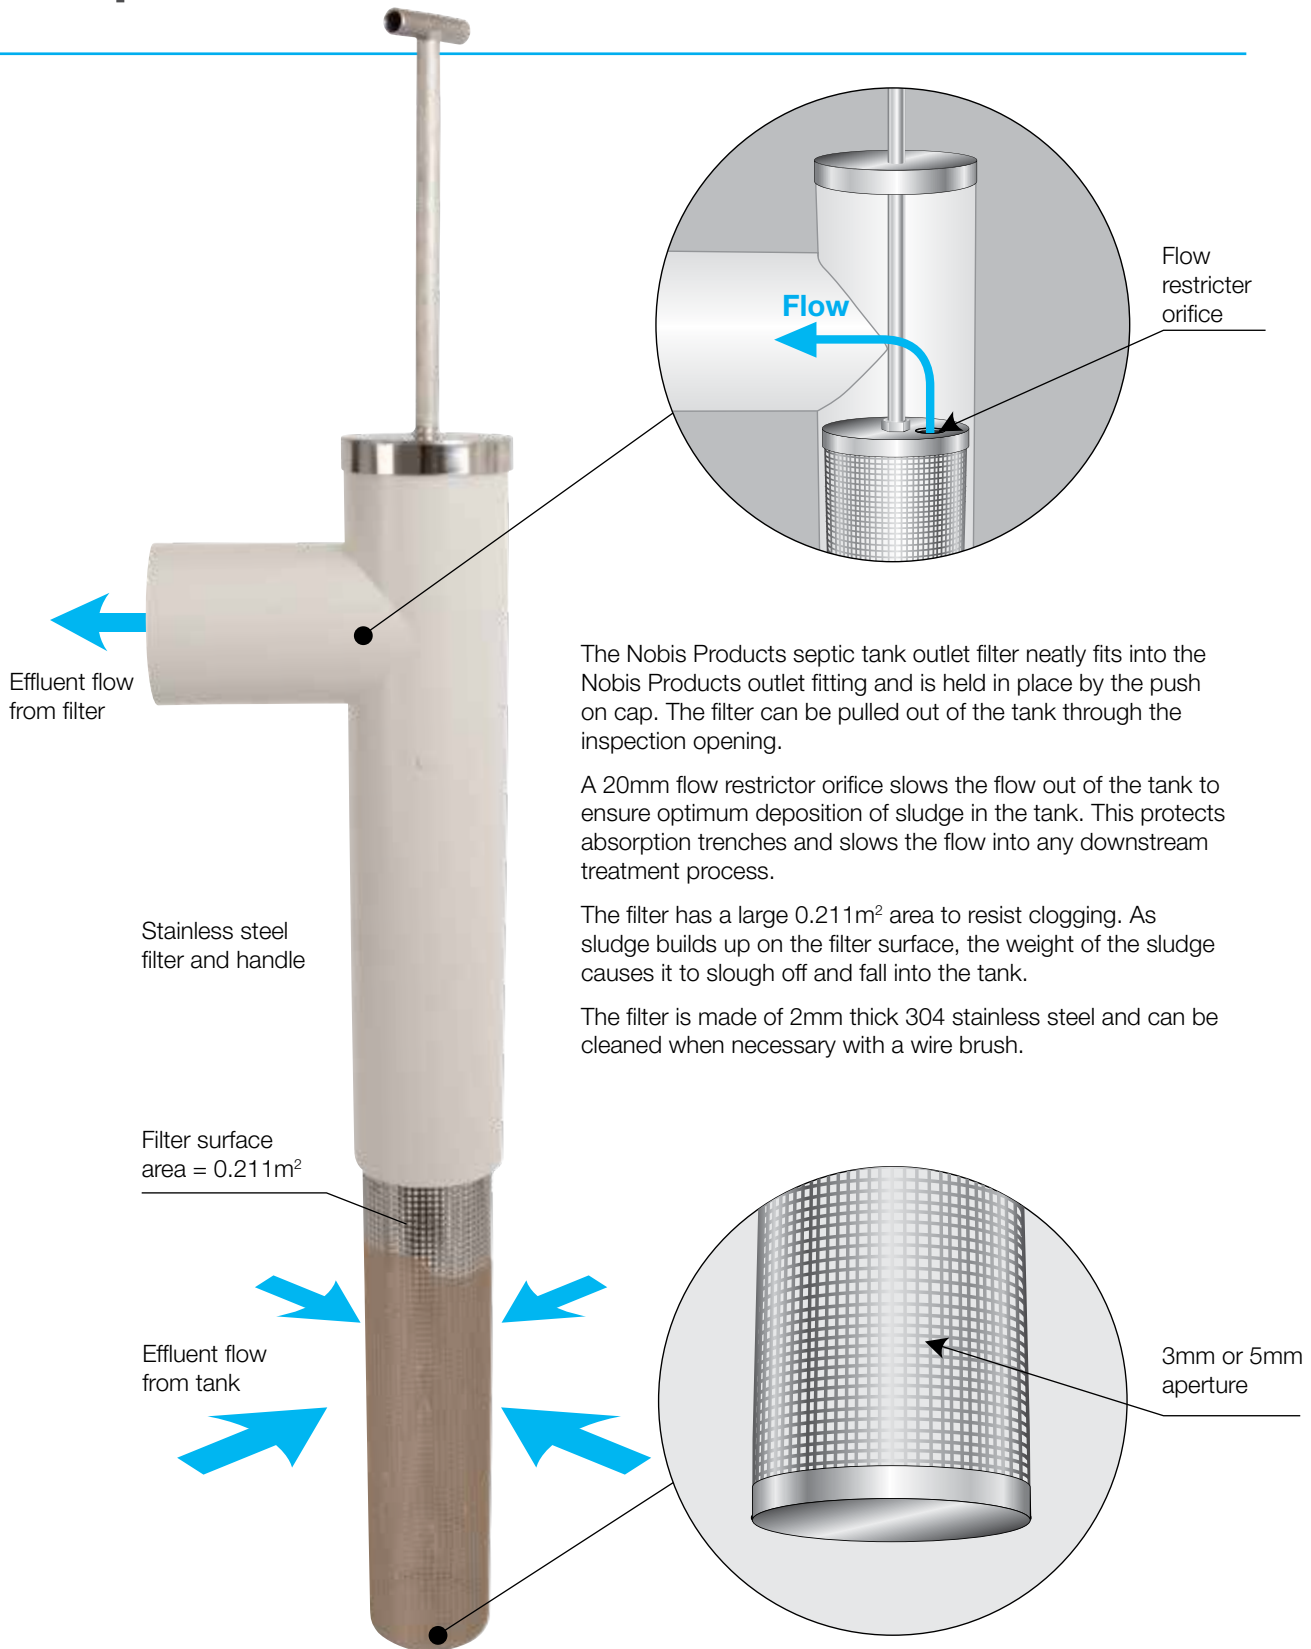

The Nobis Products septic tank outlet filter neatly fits into the Nobis Products outlet fitting and is held in place by the push on cap. The filter can be pulled out of the tank through the inspection opening.

A 20mm flow restricter orifice slows the flow out of the tank to ensure optimum deposition of sludge in the tank. This protects absorption trenches and slows the flow into any downstream treatment process.

The filter has a large 0.211m<sup>2</sup> area to resist clogging. As sludge builds up on the filter surface, the weight of the sludge causes it to slough off and fall into the tank.

The filter is made of 2mm thick 304 stainless steel and can be cleaned when necessary with a wire brush.


Stainless Steel Septic Tank Outlet Filter

PO Box 125  
Cobbitty 2570  
Ph: 1300 794 633  
sales@nobisproducts.com.au



# Septic Tank Outlet Filter

**STAINLESS STEEL PRODUCTS**

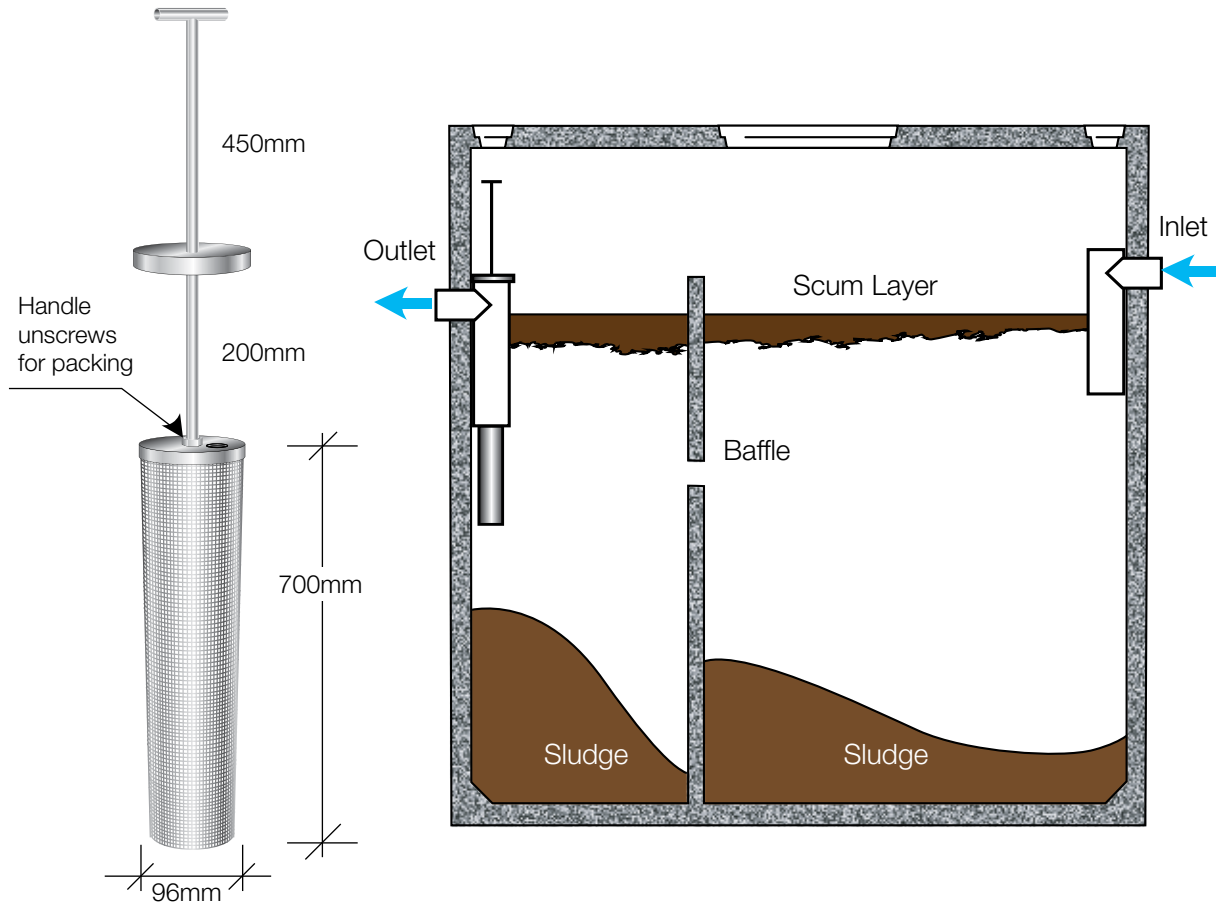

FEATURE	BENEFIT
304 stainless steel	Robust. Provides long life and makes it easy to clean.
Filter area – 0.211m <sup>2</sup>	Large area to trap solids. Extends cleaning periods.
Filter aperture size TOF3	3mm x 3mm
Filter aperture size TOF5	5mm x 5mm
Diameter	96mm
Height of filter area	700mm
Flow restricter orifice – 20mm	Slows outlet flow. Improves solids settling in the tank. Stops septic tank hydraulic shock.
Overall length	1150mm
Cap secures filter in outlet square	Prevents overflow of solids into top of outlet if tank level rises. Stops filter floating out of outlet square.
In service in Australia since	2011

Stainless Steel Septic Tank Outlet Filter

PO Box 125  
Cobbitty 2570  
Ph: 1300 794 633  
sales@nobisproducts.com.au

